



MAX series

Ordering information

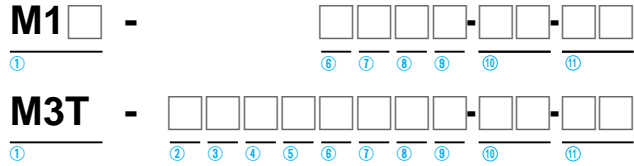

RoHS

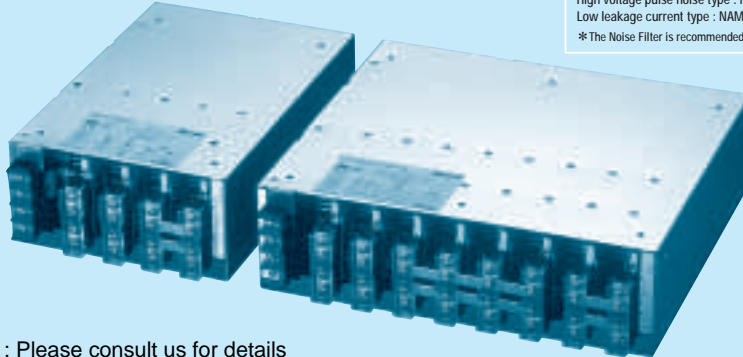

RoHS : Please consult us for details


Recommended Noise Filter
MAX1600F NAC-30-472




High voltage pulse noise type : NAP series
Low leakage current type : NAM series

* The Noise Filter is recommended to connect with several devices.

MAX1600T TAC-10-683
MAX3200T TAC-20-683



- ① Abbreviation type name of MAX series
M1F : MAX1600F
M1T : MAX1600T
M3T : MAX3200T
- ② Slot 8 Output module
- ③ Slot 7 Output module
- ④ Slot 6 Output module
- ⑤ Slot 5 Output module
- ⑥ Slot 4 Output module
- ⑦ Slot 3 Output module
- ⑧ Slot 2 Output module
- ⑨ Slot 1 Output module
- ⑩ Parallel code
- ⑪ Series and option code
Refer to instruction manual



8 7 6 5 4 3 2 1
Slot

* The number of slot is different depending on the model.

SPECIFICATIONS

| | MODEL | MAX1600F (M1F) | MAX1600T (M1T) | MAX3200T (M3T) | |
|-------------------------|---|--|---|------------------------------|---------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ / DC120 - 350 | AC170 - 264 3 φ | AC170 - 264 3 φ | |
| | FREQUENCY[Hz] | 47 - 63 | 47 - 63 | 47 - 63 | |
| | CURRENT[A] | AC100V *1 | 19typ | - | - |
| | | AC200V *2 | 10typ | 6.5typ | 13typ |
| | POWER FACTOR | AC100V *1 | 0.99typ | - | - |
| | | AC200V *2 | 0.95typ | 0.95typ | 0.95typ |
| | INRUSH CURRENT [A] | AC100V | 20/40typ (Primary inrush current/Secondary inrush current) | - | - |
| | | AC200V | 40/40typ (Primary inrush current/Secondary inrush current) | 40typ | 40typ |
| | EFFICIENCY[%] | AC100V *1 | 78typ | - | - |
| | | AC200V *2 | 82typ | 85typ | 85typ |
| LEAKAGE CURRENT [mA] *3 | | 1.5max | 2max | 2max | |
| OUTPUT | NUMBER OF SLOT *4 | 4 | 4 | 8 | |
| | TOTAL MAXIMUM POWER[W] | AC90 - 150V *5 | 1500 | - | - |
| | | AC170 - 264V *5 | 1600 | 1600 | 3200 |
| | START-UP TIME [ms] | AC100V *1 | 700typ | - | - |
| | | AC200V *2 | 500typ | 500typ | 500typ |
| HOLD-UP TIME[ms] *1 | | 20typ | 20typ | 20typ | |
| FUNCTION | ALARM | FAN ALARM | FAN AND OPEN PHASE ALARM | FAN AND OPEN PHASE ALARM | |
| | INPUT-OUTPUT, RC | AC3,000V 1minute, Cutoff current=25mA, DC500V 50MΩ min (At Room Temperature) (Cutoff current = 100mA : MAX3200T) | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current=25mA, DC500V 50MΩ min (At Room Temperature) | | | |
| ISOLATION | OUTPUT, RC-FG | AC500V 1minute, Cutoff current=100mA, DC500V 50MΩ min (At Room Temperature) | | | |
| | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +65°C, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing) 9,000m (30,000feet) max | | | |
| | VIBRATION | 19.6m/s ² , 10 - 55Hz, 3minutes period, 60minutes each along X, Y and Z axis | | | |
| ENVIRONMENT | IMPACT | 196.1m/s ² , 11ms, once each X, Y and Z axis | | | |
| | SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, Complies with DEN-AN (At only AC input) | | |
| CONDUCTED NOISE | | Complies with FCC-B, VCCI-B, CISPR22-B and EN55022-B | Complies with FCC-A, VCCI-A, CISPR22-A and EN55011-A | | |
| HARMONIC ATTENUATOR | | Complies with IEC61000-3-2 | - | - | |
| OTHERS | CASE SIZE *6 | 200 X 97 X 300mm (W X H X D) | 200 X 97 X 300mm (W X H X D) | 340 X 97 X 300mm (W X H X D) | |
| | WEIGHT | 7kg max | 7kg max | 14kg max | |
| | COOLING METHOD | Forced cooling (built-in) | | | |

*1 It is a value when M1F-HFEC-00 (MAX1600F : 5V80A, 12V34A, 15V27A, 24V17A) outputs 1500W. The value changes by composing the output modules.

*2 It is a value when M1F-HFEC-00 (MAX1600F : 5V80A, 12V34A, 15V27A, 24V17A) outputs 1600W or M1T-HFEC-00 (MAX1600T : 5V80A, 12V34A, 15V27A, 24V17A) outputs 1600W or M3T-HHFFEECC-00 (MAX3200T : 5V80A X2, 12V34A X2, 15V27A X2, 24V17A X2) outputs 3200W. The value changes by composing the output modules.

*3 Complies with IEC60950 at AC240V 60Hz.

*4 Each output module is insulated.

*5 Refer to derating.

*6 Case size contains neither the terminal blocks (cover) nor the screw.

Output module specifications


| ITEM | CODE | A | B | C | D | E | F | G | H | I | O |
|------------------------------------|---------------------------|---|-------------|-------------|--------------|---------------|---------------|---------------|---------------|---------------|-------------|
| Number of slots used | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| VOLTAGE[V] | | 2 | 3.3 | 5 | 7.5 | 12 | 15 | 18 | 24 | 28 | BLANK PANEL |
| CURRENT[A] | | 80 | 80 | 80 | 54 | 34 | 27 | 22 | 17 | 14.5 | |
| LINE REGURATION[mV]max | | 20 | 20 | 20 | 30 | 48 | 60 | 72 | 96 | 112 | |
| LOAD REGURATION[mV]max | | 40 | 40 | 40 | 60 | 100 | 120 | 150 | 150 | 180 | |
| RIPPLE [mV]max | 0 to +50°C*1 | 80 | 80 | 80 | 120 | 120 | 120 | 120 | 120 | 120 | |
| | -20 to 0°C*1 | 140 | 140 | 140 | 160 | 160 | 160 | 160 | 160 | 160 | |
| RIPPLE NOISE [mV]max | 0 to +50°C*1 | 120 | 120 | 120 | 150 | 150 | 150 | 150 | 150 | 150 | |
| | -20 to 0°C*1 | 160 | 160 | 160 | 180 | 180 | 180 | 180 | 180 | 180 | |
| TEMPRATURE COEFFICIENT[mV]max | 0 to +50°C | 40 | 40 | 50 | 75 | 120 | 150 | 180 | 240 | 280 | |
| | -10 to +50°C | 60 | 60 | 75 | 120 | 180 | 225 | 270 | 360 | 420 | |
| DRIFT[mV]max | *2 | 12 | 12 | 20 | 30 | 48 | 60 | 72 | 96 | 112 | |
| OUTPUT VOLTAGE SETTING[V] | | 2.00 - 2.06 | 3.30 - 3.40 | 5.00 - 5.15 | 7.50 - 7.80 | 12.00 - 12.48 | 15.00 - 15.60 | 18.00 - 18.72 | 24.00 - 24.96 | 28.00 - 29.12 | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | | 1.98 - 2.20 | 2.64 - 3.63 | 4.00 - 5.50 | 6.00 - 8.25 | 9.60 - 13.20 | 12.00 - 16.50 | 14.40 - 19.80 | 19.20 - 26.40 | 22.40 - 30.80 | |
| OVERCURRENT PROTECTION | | Works over 105% of rated current automatic recovery | | | | | | | | | |
| OVERVOLTAGE PROTECTION[V] | | 4.00 - 5.50 | 4.00 - 5.50 | 5.75 - 7.00 | 8.63 - 10.50 | 13.80 - 16.80 | 17.25 - 21.00 | 20.70 - 25.20 | 27.60 - 33.60 | 32.20 - 39.20 | |
| OUTPUT CURRENT IN PARALLEL[A] *3 | TWO MODULES IN PARALLEL | 144 | 144 | 144 | 97 | 61 | 49 | 40 | 31 | 26 | - |
| | THREE MODULES IN PARALLEL | 216 | 216 | 216 | 146 | 92 | 73 | 60 | 46 | 40 | - |
| | FOUR MODULES IN PARALLEL | 300 | 300 | 300 | 195 | 125 | 100 | 80 | 63 | 54 | - |
| | FIVE MODULES IN PARALLEL | 360 | 360 | 360 | 243 | 153 | 122 | 100 | 77 | 66 | - |
| | SIX MODULES IN PARALLEL | 444 | 444 | 444 | 292 | 196 | 149 | 120 | 92 | 80 | - |
| | SEVEN MODULES IN PARALLEL | 516 | 516 | 516 | 341 | 217 | 173 | 140 | 107 | 94 | - |
| | EIGHT MODULES IN PARALLEL | 600 | 600 | 600 | 390 | 250 | 200 | 160 | 127 | 108 | - |

MAX


- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN : RM101).
Ripple and Ripple Noise is measured by using measuring board with capacitor of 470 μF between 20mm to 100mm from the output terminal.
- *2 Drift is change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Modularity in parallel are built to order and are not possible for the user to assemble them.

Block diagram


● MAX1600F

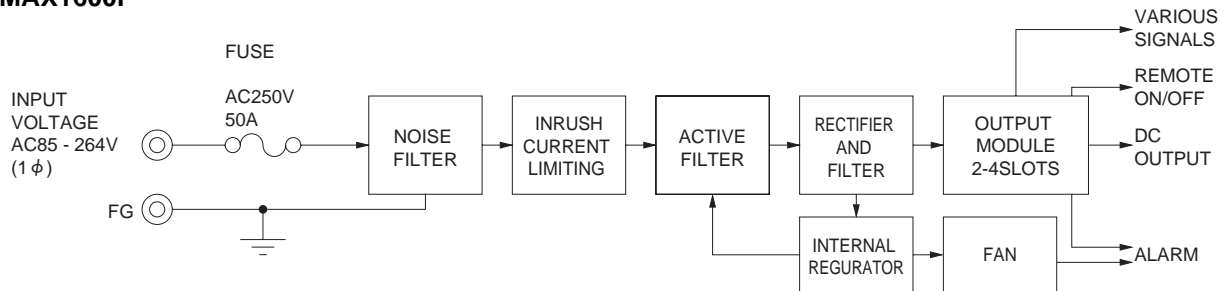

● MAX1600T / MAX3200T

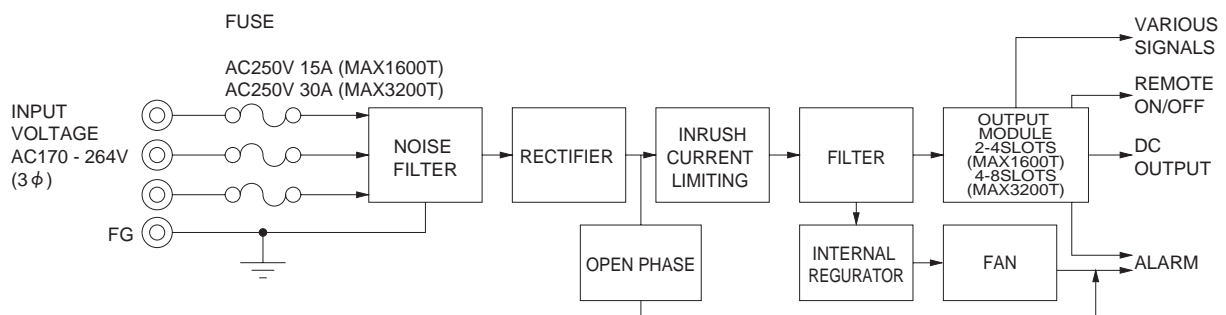


MAX1600F / MAX1600T external view

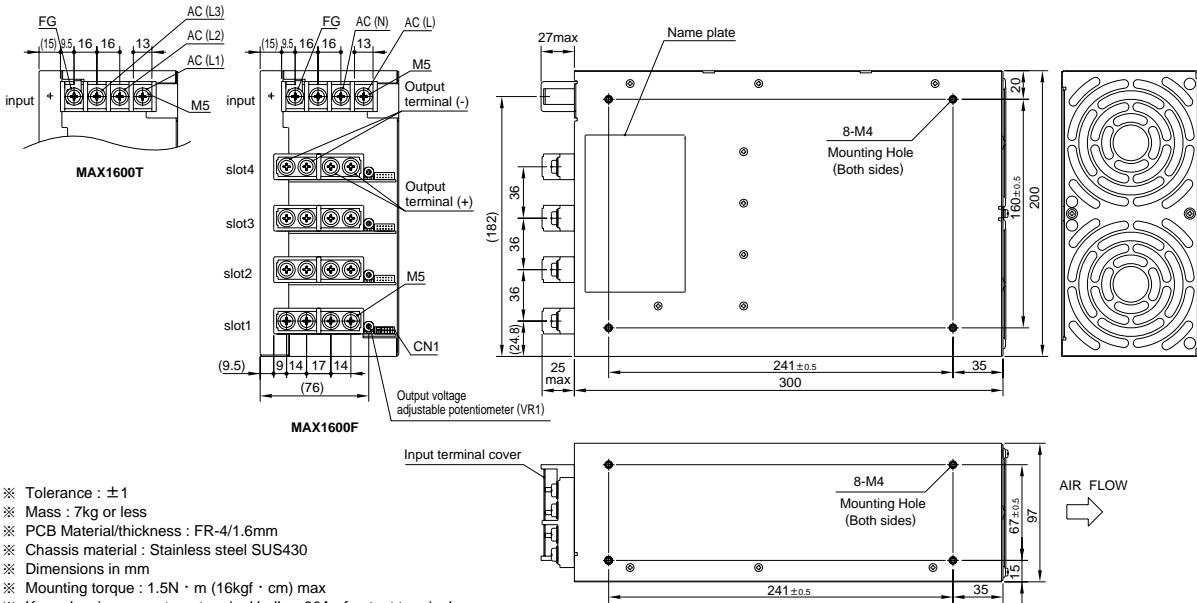

MAX

- ※ Tolerance : ± 1
- ※ Mass : 7kg or less
- ※ PCB Material/thickness : FR-4/1.6mm
- ※ Chassis material : Stainless steel SUS430
- ※ Dimensions in mm
- ※ Mounting torque : $1.5N \cdot m$ (16kgf · cm) max
- ※ Keep drawing current per terminal below 80A of output terminal.
- ※ The housing for the remote sensing unused is mounted on CN1 of each output module.
However, when the output module is connected in parallel, the housing is mounted on only master output module.
- ※ Output terminal covers are appended.

MAX3200T external view

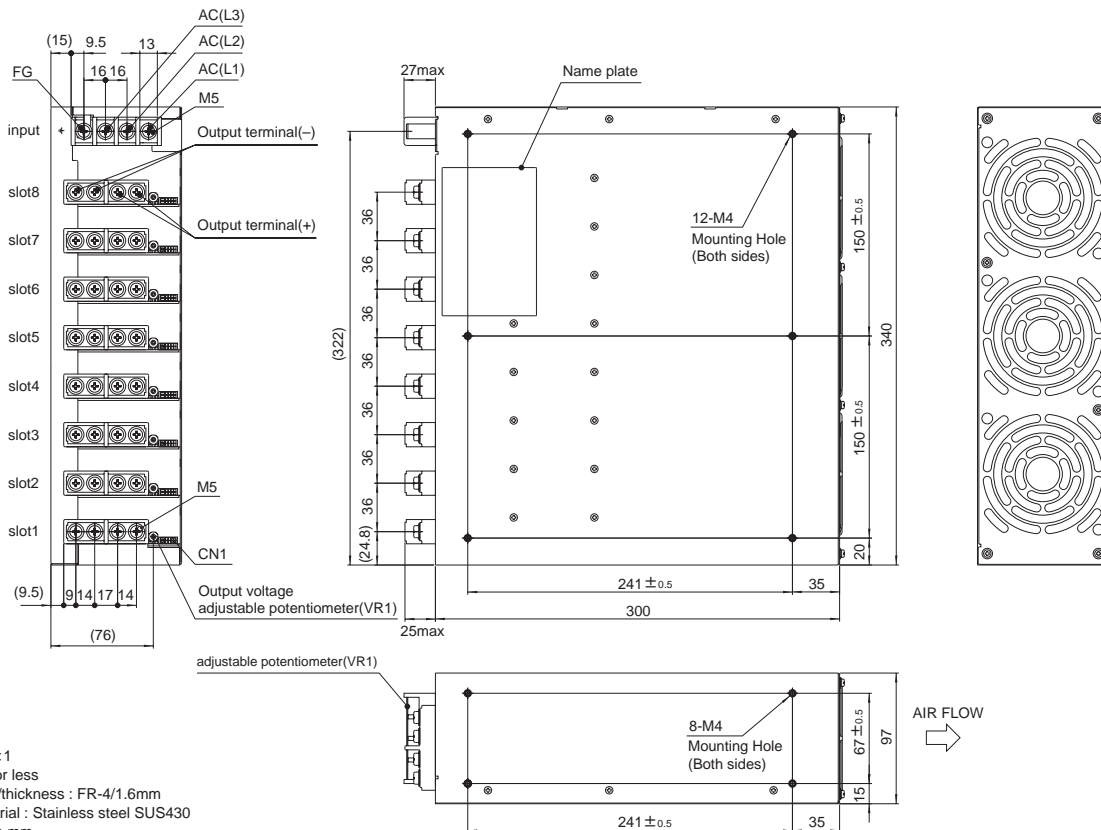

- ※ Tolerance : ± 1
- ※ Mass : 14kg or less
- ※ PCB Material/thickness : FR-4/1.6mm
- ※ Chassis material : Stainless steel SUS430
- ※ Dimensions in mm
- ※ Mounting torque : $1.5N \cdot m$ (16kgf · cm) max
- ※ Keep drawing current per terminal below 80A of output terminal.
- ※ The housing for the remote sensing unused is mounted on CN1 of each output module.
However, when the output module is connected in parallel, the housing is mounted on only master output module.
- ※ Output terminal covers are appended.