


PB Series Attachment

BASE Attachment

Plate model	Applicable to model
F-PBA10-1	PBA10F
F-PBA15-1	PBA15F, PBW15F
F-PBA30-1	PBA30F, PBW30F
F-PBA50-1	PBA50F, PBW50F
F-PBA75-1	PBA75F
F-PBA100-1	PBA100F
F-PBA150-1	PBA150F

Example

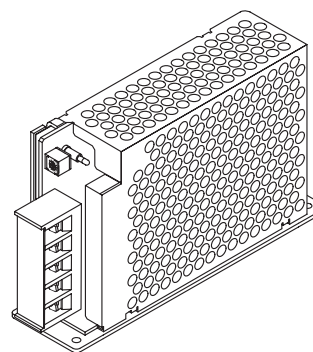


< TOP VIEW > (Unit : mm) (Tolerance : ±1)

F-PBA10-1 Size ★ Material : SECC ★ Thickness : 2.0	F-PBA15-1 Size ★ Material : SECC ★ Thickness : 2.0
★ M3 × 6ℓ Flat screw is requested when mounting.	
Mounting hole size FRONT←	Mounting hole size FRONT←
F-PBA30-1 Size ★ Material : SECC ★ Thickness : 2.0	F-PBA50-1 Size ★ Material : SECC ★ Thickness : 2.0
★ M3 × 6ℓ Flat screw is requested when mounting.	
Mounting hole size FRONT←	Mounting hole size FRONT←

< TOP VIEW > (Unit : mm) (Tolerance : ±1)


F-PBA75-1

Size

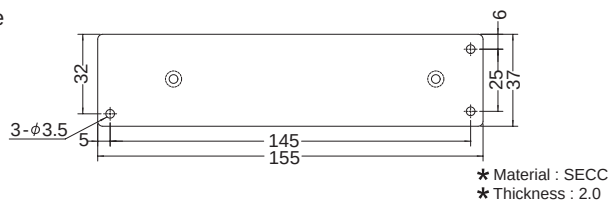


F-PBA100-1

Size

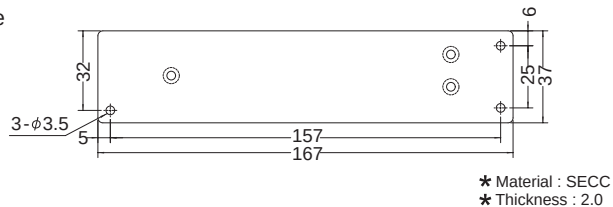


★ M3 × 6ℓ Flat screw is requested when mounting.

Mounting hole size

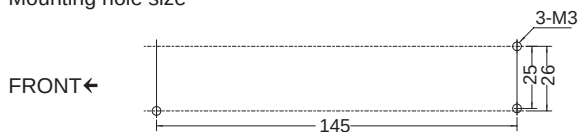


Mounting hole size

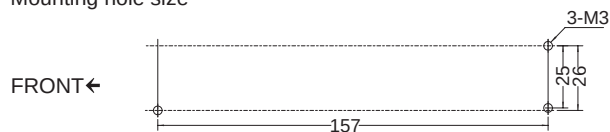


F-PBA150-1

Size

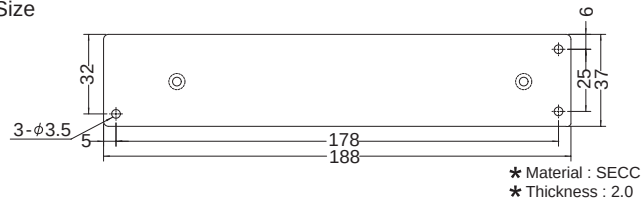

★ M3 × 6ℓ Flat screw is requested when mounting.


Mounting hole size

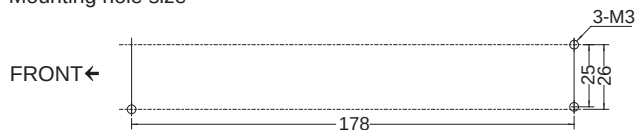

FRONT • REVERSE Attachment

Plate model	Applicable to model
F-PBA10-2	PBA10F
F-PBA15-2	PBA15F, PBW15F
F-PBA30-2	PBA30F, PBW30F
F-PBA50-2	PBA50F, PBW50F
F-PBA75-2	PBA75F
F-PBA100-2	PBA100F
F-PBA150-2	PBA150F

Example

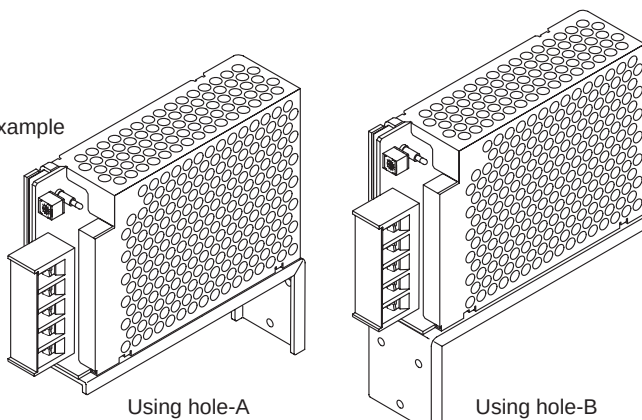


Using hole-A

Using hole-B

〈 TOP VIEW 〉 (Unit : mm) (Tolerance : ±1)

F-PBA10-2


Size

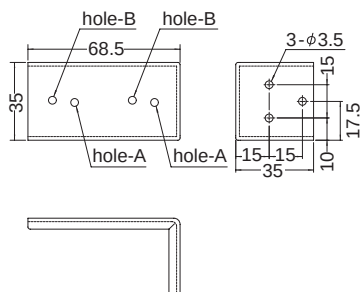

★ Material : SECC
★ Thickness : 1.6

F-PBA15-2


Size

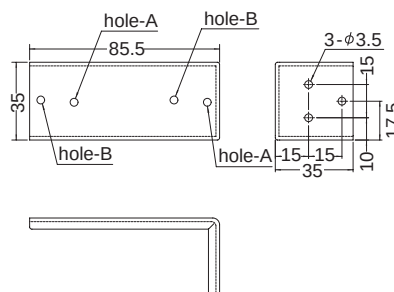

★ Material : SECC
★ Thickness : 1.6

F-PBA30-2


Size

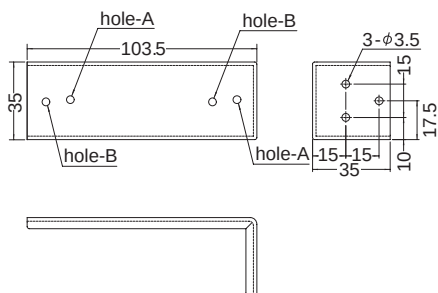

★ Material : SECC
★ Thickness : 1.6

F-PBA50-2

Size

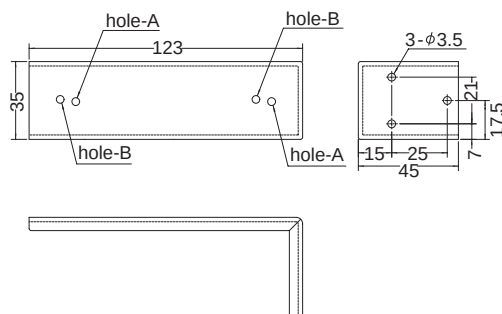


★ Material : SECC
★ Thickness : 2.0

< TOP VIEW > (Unit : mm) (Tolerance : ± 1)

F-PBA75-2


Size

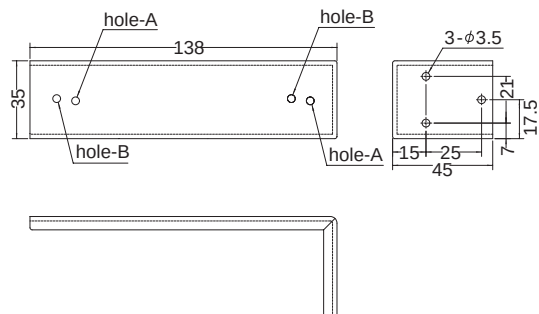

★ Material : SECC
★ Thickness : 2.0

F-PBA100-2


Size

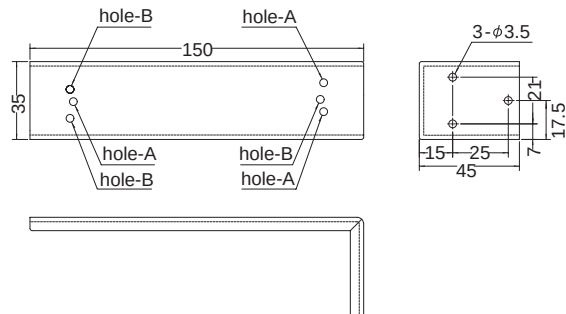

★ Material : SECC
★ Thickness : 2.0

F-PBA150-2

Size

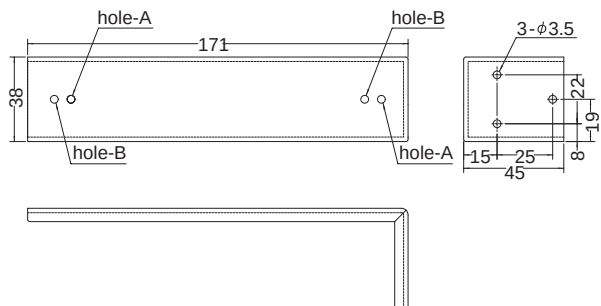


★ Material : SECC
★ Thickness : 2.0

Attachment for Replacement

This is an attachment when replacing to PBA series from P・PAA series.

Plate model	Applicable to model
F-PPBA15-1	P15 → PBA15F
F-PPBA30-1	P30 → PBA30F
F-PPBA50-1	P50, PAA50F → PBA50F
F-PPBA75-1	PAA75F → PBA75F
F-PPBA100-1	P100, PAA100F → PBA100F
F-PPBA150-1	P150, PAA150F → PBA150F

Example
(PBA50F)

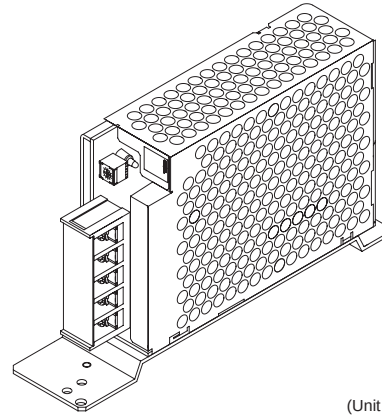

(Unit : mm) (Tolerance : ±1)

F-PPBA15-1		F-PPBA30-1	
Size	★ Material : SECC ★ Thickness : 1.6	Size	★ Material : SECC ★ Thickness : 1.6
Mounting	(BOTTOM VIEW)	Mounting	(BOTTOM VIEW)
★ M3 × 8ℓ Flat screw is requested when mounting.			
Mounting hole size	FRONT ←	Mounting hole size	FRONT ←

(Unit : mm) (Tolerance : ± 1)

F-PPBA50-1 Size Mounting (SIDE VIEW) ★ Material : SECC ★ Thickness : 1.6	F-PPBA75-1 Size ★ Material : SECC ★ Thickness : 1.6
★ M3 x 8ℓ Flat screw is requested when mounting.	
Mounting hole size FRONT ←	Mounting hole size FRONT ←
F-PPBA100-1 Size Mounting (SIDE VIEW) ★ Material : SECC ★ Thickness : 1.6	F-PPBA150-1 Size ★ Material : SECC ★ Thickness : 1.6
★ M3 x 8ℓ Flat screw is requested when mounting.	
Mounting hole size FRONT ←	Mounting hole size FRONT ←

■Din rail Attachment Plate(PB Series)

APPLICABLE TO MODEL

Din rail width : 35mm

Plate model	Model
FD-PBA10	PBA10F
FD-PBA15	PBA15F, PBW15F
FD-PBA30	PBA30F, PBW30F
FD-PBA50	PBA50F, PBW50F, PBA75F
FD-PBA100	PBA100F, PBA150F
FD-PBA300	PBA300F

FD-PBA10, FD-PBA15, FD-PBA30 EXTERNAL VIEW

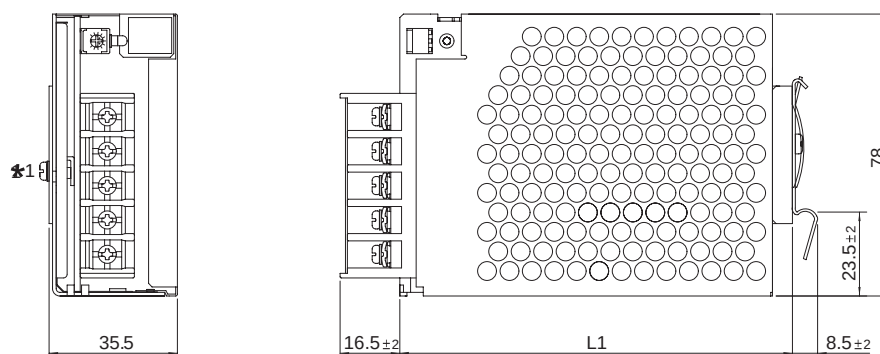


Plate model	Model	L1
FD-PBA10	PBA10F	73.5±2
FD-PBA15	PBA15F, PBW15F	90.5±2
FD-PBA30	PBA30F, PBW30F	108.5±2

- * Material : SECC
- * Thickness : 1.0
- * Tolerance : ±1
- *1 Two screws of M3 are necessary for installation

FD-PBA50, FD-PBA100 EXTERNAL VIEW

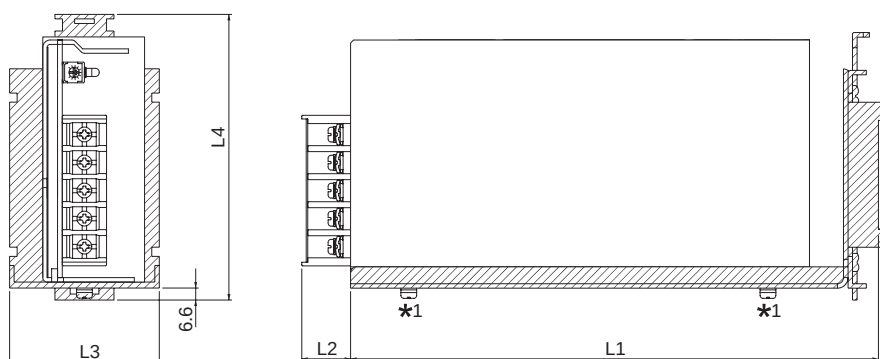


Plate model	Model	L1	L2	L3	L4
FD-PBA50	PBA50F	135	16.5±2	41	102.5
	PBA75F	150			
FD-PBA100	PBA100F	162	13.5±2	42.5	112
	PBA150F	183			

- * Material : SECC
- * Thickness : 1.6
- * Tolerance : ±1
- *1 Two screws of M3 are necessary for installation

FD-PBA300 EXTERNAL VIEW

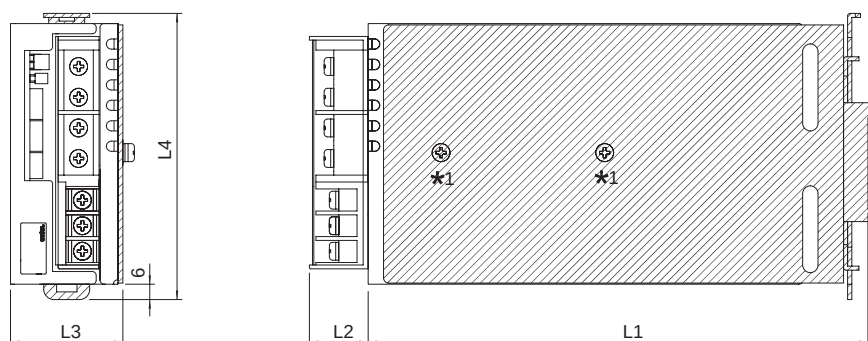


Plate model	Model	L1	L2	L3	L4
FD-PBA300	PBA300F	195.5	25max	44	112

- * Material : SPHC
- * Thickness : 2.0
- * Tolerance : ±1
- *1 Two screws of M4 are necessary for installation

Harness to use the function is prepared in PB series.

PB Series

Mating harness

Model	Harness model #	Contents
PBA10F, PBA15F, PBW15F, PBA30F, PBW30F, PBA50F, PBW50F, PBA75F, PBA100F, PBA150F ★1	H-IN-1 or H-IN-8	Input harness when I/O interface is connector type (option : -J)
PBA10F, PBA15F, PBA30F, PBA50F	H-OU-20	Output harness when I/O interface is connector type (option : -J)
PBA75F, PBA100F, PBA150F ★1	H-OU-21	Output harness when I/O interface is connector type (option : -J)
PBW15F, PBW30F, PBW50F	H-OU-27	Output harness when I/O interface is connector type (option : -J)
PBA50F, PBW50F, PBA75F, PBA100F, PBA150F	H-RC-1	Harness for using option : -R
PBA100F, PBA150F ★2	H-SN-1	Harness for using option : -K
PBA50F, PBW50F, PBA75F, PBA100F, PBA150F	H-SN-18	Harness for using option : -V
PBA300F	H-PA-3	Harness for parallel operation
PBA600F	H-SN-20	Harness for using all functions of CN1 and CN2
PBA1000F	H-SN-21	Harness for using all functions except remote sensing of CN2
PBA1500F	H-SN-22	Harness for using all functions of CN3
	H-SN-24	Harness for using example remote ON/OFF circuit (C)

★1 Available for 12V, 15V, 24V, 36V and 48V output model in PBA100F / 150F.

★2 Available for 3.3V and 5V output model in PBA100F / 150F.


●Model number H-IN-1 Housing : 5199-04 (Molex) Pin : 5194 (Molex)	●Type	●Wire <table><tr><th>Pin #</th><th>Wire</th><th>AWG</th><th>Color</th><th>Length ℓ (mm)</th></tr><tr><td>1</td><td>UL1015</td><td>20</td><td>green</td><td>500</td></tr><tr><td>2</td><td>UL1015</td><td>20</td><td>black</td><td>500</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>UL1015</td><td>20</td><td>white</td><td>500</td></tr></table>	Pin #	Wire	AWG	Color	Length ℓ (mm)	1	UL1015	20	green	500	2	UL1015	20	black	500	3					4	UL1015	20	white	500										
Pin #	Wire	AWG	Color	Length ℓ (mm)																																	
1	UL1015	20	green	500																																	
2	UL1015	20	black	500																																	
3																																					
4	UL1015	20	white	500																																	
●Model number H-IN-8 Housing : 5199-04 (Molex) Pin : 5194 (Molex)	●Type	●Wire <table><tr><th>Pin #</th><th>Wire</th><th>AWG</th><th>Color</th><th>Length ℓ (mm)</th></tr><tr><td>1</td><td>UL1015</td><td>20</td><td>green/yellow</td><td>500</td></tr><tr><td>2</td><td>UL1015</td><td>20</td><td>black</td><td>500</td></tr><tr><td>3</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>UL1015</td><td>20</td><td>white</td><td>500</td></tr></table>	Pin #	Wire	AWG	Color	Length ℓ (mm)	1	UL1015	20	green/yellow	500	2	UL1015	20	black	500	3					4	UL1015	20	white	500										
Pin #	Wire	AWG	Color	Length ℓ (mm)																																	
1	UL1015	20	green/yellow	500																																	
2	UL1015	20	black	500																																	
3																																					
4	UL1015	20	white	500																																	
●Model number H-OU-20 Housing : 5196-04 (Molex) Pin : 5194 (Molex)	●Type	●Wire <table><tr><th>Pin #</th><th>Wire</th><th>AWG</th><th>Color</th><th>Length ℓ (mm)</th></tr><tr><td>1</td><td>UL1015</td><td>18</td><td>red</td><td>500</td></tr><tr><td>2</td><td>UL1015</td><td>18</td><td>red</td><td>500</td></tr><tr><td>3</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr><tr><td>4</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr></table>	Pin #	Wire	AWG	Color	Length ℓ (mm)	1	UL1015	18	red	500	2	UL1015	18	red	500	3	UL1015	18	black	500	4	UL1015	18	black	500										
Pin #	Wire	AWG	Color	Length ℓ (mm)																																	
1	UL1015	18	red	500																																	
2	UL1015	18	red	500																																	
3	UL1015	18	black	500																																	
4	UL1015	18	black	500																																	
●Model number H-OU-21 Housing : 5196-06 (Molex) Pin : 5194 (Molex)	●Type	●Wire <table><tr><th>Pin #</th><th>Wire</th><th>AWG</th><th>Color</th><th>Length ℓ (mm)</th></tr><tr><td>1</td><td>UL1015</td><td>18</td><td>red</td><td>500</td></tr><tr><td>2</td><td>UL1015</td><td>18</td><td>red</td><td>500</td></tr><tr><td>3</td><td>UL1015</td><td>18</td><td>red</td><td>500</td></tr><tr><td>4</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr><tr><td>5</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr><tr><td>6</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr></table>	Pin #	Wire	AWG	Color	Length ℓ (mm)	1	UL1015	18	red	500	2	UL1015	18	red	500	3	UL1015	18	red	500	4	UL1015	18	black	500	5	UL1015	18	black	500	6	UL1015	18	black	500
Pin #	Wire	AWG	Color	Length ℓ (mm)																																	
1	UL1015	18	red	500																																	
2	UL1015	18	red	500																																	
3	UL1015	18	red	500																																	
4	UL1015	18	black	500																																	
5	UL1015	18	black	500																																	
6	UL1015	18	black	500																																	
●Model number H-OU-27 Housing : 5196-04 (Molex) Pin : 5194 (Molex)	●Type	●Wire <table><tr><th>Pin #</th><th>Wire</th><th>AWG</th><th>Color</th><th>Length ℓ (mm)</th></tr><tr><td>1</td><td>UL1015</td><td>18</td><td>red</td><td>500</td></tr><tr><td>2</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr><tr><td>3</td><td>UL1015</td><td>18</td><td>black</td><td>500</td></tr><tr><td>4</td><td>UL1015</td><td>18</td><td>purple</td><td>500</td></tr></table>	Pin #	Wire	AWG	Color	Length ℓ (mm)	1	UL1015	18	red	500	2	UL1015	18	black	500	3	UL1015	18	black	500	4	UL1015	18	purple	500										
Pin #	Wire	AWG	Color	Length ℓ (mm)																																	
1	UL1015	18	red	500																																	
2	UL1015	18	black	500																																	
3	UL1015	18	black	500																																	
4	UL1015	18	purple	500																																	

●Model number

H-RC-1

Housing : XHP-2 (J.S.T.)
Pin : SXH-001T-P0.6 (J.S.T.)

●Type



●Wire


Pin #	Wire	AWG	Color	Length ℓ (mm)
1	UL1007	22	orange	500
2	UL1007	22	blue	500

●Model number

H-SN-1

Housing : XHP-4 (J.S.T.)
Pin : SXH-001T-P0.6 (J.S.T.)

●Type



●Wire


Pin #	Wire	AWG	Color	Length ℓ (mm)
1				
2	UL1061	28	black	500
3	UL1061	28	red	500
4				

●Model number

H-SN-18

Housing : PHR-2 (J.S.T.)
Pin : SPH-002T-P0.5S (J.S.T.)

●Type



●Wire


Pin #	Wire	AWG	Color	Length ℓ (mm)
1	UL1007	26	yellow	500
2	UL1007	26	orange	500

●Model number

H-PA-3

Housing : PHDR-10VS(J.S.T)
Pin : SPHD-002T-P0.5(J.S.T)

●Type



●Wire


Pin #	Wire	AWG	Color	Length ℓ (mm)
1	-	-	-	-
2	UL1061	28	red	270
3	-	-	-	-
4	UL1061	28	black	270
5	UL1061	28	yellow	270
6	UL1061	28	green	270
7	UL1061	28	blue	270
8	-	-	-	-
9	UL1061	28	orange	270
10	UL1061	28	purple	270

●Model number

H-SN-20

Housing : PHDR-10VS(J.S.T)
Pin : SPHD-002T-P0.5(J.S.T)

●Type



●Wire


Pin #	Wire	AWG	Color	Length ℓ (mm)
1	-	-	-	-
2	UL1061	28	red	500
3	-	-	-	-
4	UL1061	28	black	500
5	UL1061	28	yellow	500
6	UL1061	28	green	500
7	UL1061	28	blue	500
8	UL1061	28	black	500
9	UL1061	28	orange	500
10	UL1061	28	purple	500

●Model number

H-SN-21

Housing : PHDR-10VS(J.S.T)
Pin : SPHD-002T-P0.5(J.S.T)

●Type



●Wire


Pin #	Wire	AWG	Color	Length ℓ (mm)
1	-	-	-	-
2	-	-	-	-
3	-	-	-	-
4	-	-	-	-
5	UL1061	28	yellow	500
6	UL1061	28	green	500
7	UL1061	28	blue	500
8	UL1061	28	black	500
9	UL1061	28	orange	500
10	UL1061	28	purple	500

●Model number

H-SN-22

Housing : PHDR-8VS(J.S.T)
Pin : SPHD-002T-P0.5(J.S.T)

●Type



●Wire

Pin #	Wire	AWG	Color	Length ℓ (mm)
1	-	-	-	-
2	-	-	-	-
3	UL1061	28	pink	500
4	UL1061	28	brown	500
5	UL1061	28	white	500
6	-	-	-	-
7	UL1061	28	yellow	500
8	UL1061	28	gray	500


●Model number

H-SN-24

CN1 :
Housing : PHDR-10VS(J.S.T)
Pin : SPHD-002T-P0.5(J.S.T)

CN2 :
Housing : PHDR-08VS(J.S.T)
Pin : SPHD-002T-P0.5(J.S.T)

●Type



●Wire

	Pin #	Wire	AWG	Color	Length ℓ (mm)
CN1	1	UL1061	28	red	30
	2	UL1061	28	red	30
	3	UL1061	28	black	30
	4	UL1061	28	black	30
	5	-	-	-	-
	6	-	-	-	-
	7	-	-	-	-
	8	-	-	-	-
	9	UL1061	28	black	70
	10	UL1061	28	black	70
CN2	1	-	-	-	-
	2	-	-	-	-
	3	-	-	-	-
	4	UL1061	28	black	70
	5	UL1061	28	black	70
	6	-	-	-	-
	7	-	-	-	-
	8	-	-	-	-

- * Pin #1 and #2, Pin #3 and #4 in CN1 are connected by harness.
- * Pin #9 in CN1 and Pin #4 in CN2 are connected by harness.
- * Pin #10 in CN1 and Pin #5 in CN2 are connected by harness.

Terminal Attachment

Terminal attachment to facilitate two or more terminal connections to power supply output is prepared in PAA, UAW, UAF, MAX and ACE series.

Type	Mating Model	Contents
B-PAA600-1	PAA300 PAA600 UAW500 UAF500	Terminal attachment to facilitate two or more terminal connections to power supply output
B-MX-1	PBA600F MAX1600F MAX1600T MAX3200T	Terminal attachment to facilitate terminal connections to power supply output
B-MX-9	MAX1600F MAX1600T MAX3200T	Terminal attachment for series operation as output modules

B-PAA600-1	B-MX-1
Size ★ Material : Copper ★ Thickness : 2.0 ★ Dimension in mm	Size ★ Material : Copper ★ Thickness : 2.0 ★ Dimension in mm

★ It is necessary to install the attachments on opposite direction to avoid short-circuit between + and - in terminal block.

B-MX-9	
Size ★ Material : Copper ★ Thickness : 1.5 ★ Dimension in mm	

★ It is necessary to install B-MX-1 on opposite direction to avoid short-circuit between + and - terminal block.

★ Please note the direction of the installation to prevent the short-circuit between the outputs when using B-MX-1 and B-MX-9 at the same time.

★ The cover of terminal block does not be attached to B-MX-1 with installation screw and solderless terminal occasionally.

Type	Mating Model	Contents
B-ACE-7	ACE series	Terminal attachment to facilitate faston terminal output modules
B-ACE-8	ACE series	Terminal attachment to facilitate wiring
B-ACE-9	ACE series	Terminal attachment for series operation as output modules


★These attachments cannot be used for module code S, T, U, Y, W, Z, 9, Q, and V.

B-ACE-7	B-ACE-8
Size Installation (TOP) ★ Material : Copper ★ Thickness : 0.8 ★ Dimension in mm	Size Installation (TOP) ★ Material : Brass ★ Thickness : 1.0 ★ Dimension in mm

★ B-ACE-7: Recommended faston terminal #250.
Quantity is 1 piece.

★ B-ACE-8: Please be careful with that B-ACE-8 is not stressed in wiring.
Quantity is a couple.








B-ACE-9
Size Installation (TOP) ★ Material : Brass ★ Thickness : 1.0 ★ Dimension in mm

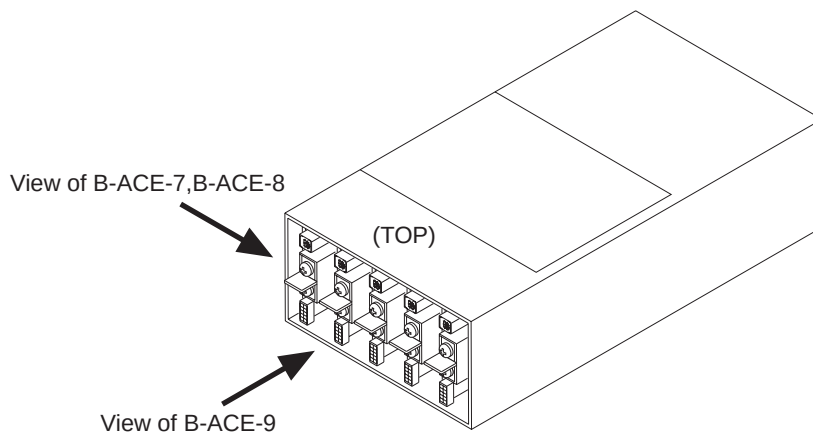

Fan unit

★Fan unit is prepared by the option.

PB Series









Fan unit type	Matching model	External	Pin connection								
FAN-PB3 (Standard)	PBA300F <Standard>		CONNECTOR = PHR-3 (Mfr : J. S. T) TERMINAL = SPH-002T-P0.5S (Mfr : J. S. T) <table><tr><th>Pin No.</th><th>Content</th></tr><tr><td>1</td><td>GND</td></tr><tr><td>2</td><td>FAN ALARM</td></tr><tr><td>3</td><td>POWER</td></tr></table> LENGTH OF HARNESS = 40 ± 5mm	Pin No.	Content	1	GND	2	FAN ALARM	3	POWER
Pin No.	Content										
1	GND										
2	FAN ALARM										
3	POWER										
FAN-PB3-F3 (Air flow reverse : -F3)	PBA300F <Modification : F3>										
FAN-PB3-F4 (Low speed : -F4)	PBA300F <Modification : F4>										
FAN-PB6 (Standard)	PBA600F <Standard>		CONNECTOR = XAP-03V-1 (Mfr : J. S. T) TERMINAL = SXA-001T-P0.6 (Mfr : J. S. T) <table><tr><th>Pin No.</th><th>Content</th></tr><tr><td>1</td><td>GND</td></tr><tr><td>2</td><td>FAN ALARM</td></tr><tr><td>3</td><td>POWER</td></tr></table> LENGTH OF HARNESS = 55 ± 7mm	Pin No.	Content	1	GND	2	FAN ALARM	3	POWER
Pin No.	Content										
1	GND										
2	FAN ALARM										
3	POWER										
FAN-PB6-F1 (Long life : -F1)	PBA600F <Modification : F1>										
FAN-PB6-F3 (Air flow reverse : -F3)	PBA600F <Modification : F3>										
FAN-PB6-F4 (Low speed : -F4)	PBA600F <Modification : F4>										

- ★ 1 Handle with care and don't add the impact such as falls or throwing to the unit.
- ★ 2 Exchange the unit after intercepting the input power.
- ★ 3 When the unit is exchanged, make sure there are not loosening of the connector and shutting the harness.

Fan unit

★Fan unit is prepared by the option.

PB Series

Fan unit type	Matching model	External	Pin connection								
FAN-PB10 (Standard)	PBA1000F <Standard>		CONNECTOR = XAP-03V-1 (Mfr : J. S. T) TERMINAL = SXA-001T-P0.6 (Mfr : J. S. T) <table><tr><th>Pin No.</th><th>Content</th></tr><tr><td>1</td><td>GND</td></tr><tr><td>2</td><td>FAN ALARM</td></tr><tr><td>3</td><td>POWER</td></tr></table> LENGTH OF HARNESS = 55 ± 7mm	Pin No.	Content	1	GND	2	FAN ALARM	3	POWER
Pin No.	Content										
1	GND										
2	FAN ALARM										
3	POWER										
FAN-PB10-F1 (Long life : -F1)	PBA1000F <Modification : F1>										
FAN-PB10-F3 (Air flow reverse : -F3)	PBA1000F <Modification : F3>										
FAN-PB10-F4 (Low speed : -F4)	PBA1000F <Modification : F4>										
FAN-PB15 (Standard)	PBA1500F <Standard>										
FAN-PB15-F1 (Long life : -F1)	PBA1500F <Modification : F1>										
FAN-PB15-F3 (Air flow reverse : -F3)	PBA1500F <Modification : F3>										
FAN-PB15-F4 (Low speed : -F4)	PBA1500F <Modification : F4>										

★ 1 Handle with care and don't add the impact such as falls or throwing to the unit.


★ 2 Exchange the unit after intercepting the input power.

★ 3 When the unit is exchanged, make sure there are not loosening of the connector and shutting the harness.

Insulated tube for PBA1000F, PBA1500F & P1500



This is a tube used to insulate an output terminal.

Plate model	Applicable to model
T-PBA1500-1	PBA1000F PBA1500F P1500
T-PBA1500-2	PBA1000F PBA1500F P1500

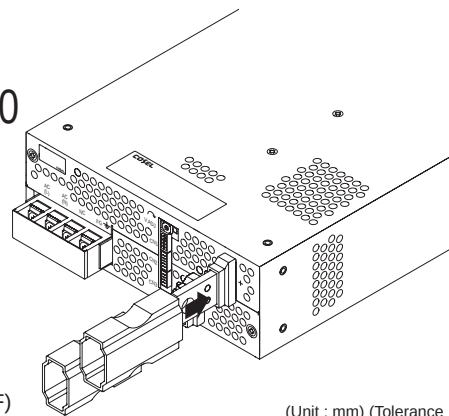

Example(PBA1500F)

(Unit : mm) (Tolerance : ± 1)

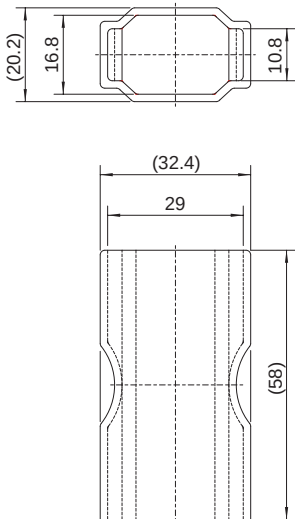T-PBA1500-1	T-PBA1500-2
★ This is used when insulating the tip portion of an output terminal.  ★ Material : Silicone rubber Black	★ This is used when insulating the root portion of an output terminal.  ★ Material : Silicone rubber Black

★ If this product is attached, a wiring portion can't visible.
Be careful not to forget to attach the screw or the bolt for electric wire connection.